

DEZZI AD25B ARTICULATED DUMP TRUCK



BULTAFRICATOUGH. Designed & Manufactured in South Africa



AD25B ARTICULATED DUMP TRUCK

SPECIFICATION SHEET

*Desmond Equipment SA (Pty) Ltd reserves the right to modify specifications without notice.

ENGINE

TYPE: **Cummins** MODEL: **QSB 260 - TIER 3**

CAPACITY: 6.7 Liters

POWER: 194kW @ 2200RPM **TORQUE:** 990Nm @ 1500RPM

TRANSMISSION

TYPE: MODEL 6WG210

GEARING: Constant mesh counter shaft with integral drop box

GEARS: Forward - 6 Reverse - 3 SPEED: 42Km/H

TORQUE CONVERTER: Single phase 3 element, lock-up clutches

effective in all gears. Downshift protection.

AXLES

4X2

FRONT: Desmond Axle with self leveling air-ride suspension

REAR: ZF MT-D 3135 axle - rigid mounted

4X**4**

FRONT: ZF MT-D 3095 axle - with self leveling air-ride suspension

REAR: ZF MT-D 3135 axle - rigid mounted

TYRES

FRONT: 26.5 R25 **REAR: 26.5 R25**

BRAKES

FRONT WHEELS: Sealed outboard wet disc brakes **REAR WHEELS:** Sealed outboard wet disc brakes

PARK BRAKE: Failsafe spring-applied hydraulic release

FRAME

Heavy duty robust frame, front and rear with tube type oscillation, adjustable

STEERING

- Articulated with 36 degree steering angle either side
- · Load-sensing, orbital-controlled
- · Ground driven emergency steering

ELECTRICS

VOLTAGE: 24 Volt

2 x 12 Volt sealed type **BATTERY:** ALTERNATOR: 24 Volt / 70 Amp

HYDRAULIC SYSTEM

OIL CAPACITY: 160 Liters

PUMPS: Variable displacement piston pump

WORKING PRESSURE: Steering - 13.7 Mpa

Tipping - 17 Mpa **Full flow filtration**

CAB

- Fully adjustable weight compensation suspension seat with seat belt
- ROPS and FOPS certified
- Rubber mounted
- Windscreen wiper
- Fully enclosed and lockable · Rear cab night working light
- · Rotating orange beacon light · Interior dome light
- Trainer-driver seat

SERVICE CAPACITIES

COOLING SYSTEM: 50 Liters **ENGINE CRANKCASE:** 21 Liters **REAR AXLE DIFFERENTIAL: 40 Liters** TRANSMISSION: 18 Liters **DIESEL TANK:** 250 Liters 4x4

FRONT DIFFERENTIAL: 36 Liters FRONT PLANETARY HUBS: 8 Liters per side

OPERATIONAL WEIGHTS

Tare Gross **Payload FRONT AXLE:** 9 480 18 980 9 500 **REAR AXLE:** 7 420 22 920 15 500 41 900 TOTAL: 16 900 25 000

STANDARD EQUIPMENT

- Emergency braking (front & rear)
- · Hinged belly plate under engine
 - Air-conditioner
- Rear window guard
- Bin up alarm

· Dash board with full instrumentation


Tinted windows

TIPPING TIMES (APPROXIMATE)

UP: 8.2 Seconds DOWN: 7.1 Seconds

LOAD BIN VOLUMES

SAE 1:1:16,2m3 SAE 2:1:13,3m3 STRUCK: 10,0m3

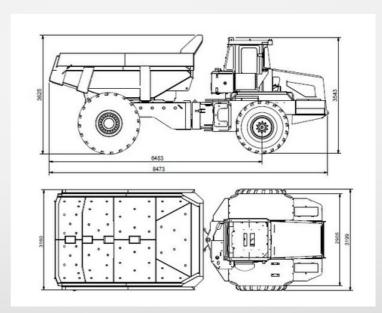



CALL: 0800 DEZZI / 33994 Head Office: +27 (0)39-685 4100 Email: machinesales@dezzi.co.za

www.dezzi.co.za