

DEZZI KATO HD308 US-R5 EXCAVATOR







DEZZI KATO HD308 US-R5 EXCAVATOR

SPECIFICATION SHEET

*Desmond Equipment SA (Pty) Ltd reserves the right to modify specifications without notice.

ENGINE

TYPE: Yanmar (four stroke cycle)
MODEL: 4TNV98-ZCVK-BHC

DISPLACEMENT: 3.32 Ltr

POWER: 42.6kW @ 2 100RPM (ISO Net)
TORQUE: 236Nm @ 1 575RPM (ISO Net)

TRAVEL SYSTEM

- Drive Independent axial piston motor with reduction for each side
- Brakes Independent disk parking brake for each side applied automatically when the travel levers are in neutral position
- · Lubrication Sealed for life rollers and front idlers with floating seals

CAB & CONTROLS

- · All weather sound suppressed cab on 4 point viscous mounting
- Right-hand lever controls the boom and bucket
- Inner right hand lever (with foot pedal) controls the right-hand track
- Inner left hand lever (with foot pedal) controls the left hand track
- Left hand lever controls the arm and swing
- Pilot control travel, boom, arm, bucket and swing
- Engine throttle Electric "Accell Dial"
- Meter & Gauges Operation mode, engine rpm, warning lights
- Work lights provided on the left side of boom and right side of front cover

HYDRAULIC SYSTEM

- Double variable piston pump and gear pump
- 5 + 5 section multiple control valves (with one free service circuit)
- Maximum discharge flow 2x 74L/min
- Maximum discharge pressure 29.4MPa
- Maximum discharge pressure (high power) 31.4MPa

SERVICE CAPACITIES

COOLING SYSTEM: 15.3 Liters
ENGINE OIL: 11.6 Liters
HYDRAULIC TANK: 50.9 Liters
HYDRAULIC SYSTEM: 103 Liters
FUEL TANK: 130 Liters
TRACK DRIVES: 2 x 1.3 Liters

OPERATIONAL WEIGHTS

OPERATING WEIGHTS: 8 300kg GROUND PRESSURE: 43kPa


BUCKET ATTACHMENT

BUCKET CAPACITY: 0.3 m3
BUCKET WIDTH (no side-cutters) 702mm
BUCKET WIDTH (with side-cutters) 816mm
BUCKET TEETH: 4

RANGES

ARM RANGE (standard arm 1 620mm)		
*A	Maximum digging radius	6 470mm
*B	Maximum digging depth	4 120mm
*C	Maximum digging height	7 430mm
*D	Maximum vertical wall	3 620mm
*E	Maximum dumping height	5 320mm
*F	Minimum swing radius	1 630mm

Operational Ranges

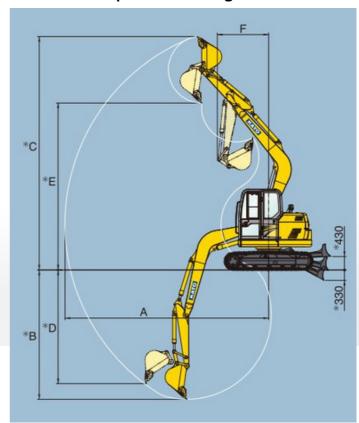

Dimensions - HD308US-R5

