



DEZZI AD25B ARTICULATED DUMP TRUCK

6X6



BUILT AFRICA TOUGH
Designed & Manufactured in South Africa

www.dezzi.co.za



AD25B ARTICULATED DUMP TRUCK

SPECIFICATION SHEET

*Desmond Equipment SA (Pty) Ltd reserves the right to modify specifications without notice.

ENGINE

TYPE : Cummins
MODEL : QSB 260 - TIER 3
CAPACITY : 6.7 Liters
POWER : 194kW @ 2200RPM
TORQUE : 990Nm @ 1500RPM

TRANSMISSION

TYPE : ZF
MODEL : 6WG210
GEARING : Constant mesh counter shaft with integral drop box
GEARS : Forward - 6
Reverse - 3
SPEED : 42Km/H
TORQUE CONVERTER : Single phase 3 element, lock-up clutches effective in all gears. Downshift protection.

AXLES

FRONT : ZF MT-D 3095 axle - with self leveling air-ride suspension
REAR : Dezzi tandem-drive free-swinging walking beam.
Rockwell differential with reduction in tandem.
Heavy duty SAHR park brake.

TYRES

FRONT : 20.5 R25 REAR : 20.5 R25

BRAKES

FRONT WHEELS : Sealed outboard wet disc brakes
REAR WHEELS : Dry disc caliper brakes
PARK BRAKE : Failsafe spring-applied hydraulic release

FRAME

Heavy duty robust frame, front and rear with tube type oscillation, adjustable

STEERING

- Articulated with 36 degree steering angle either side
- Load-sensing, orbital-controlled
- Ground driven emergency steering

ELECTRICS

VOLTAGE : 24 Volt
BATTERY : 2 x 12 Volt sealed type
ALTERNATOR : 24 Volt / 70 Amp

HYDRAULIC SYSTEM

OIL CAPACITY : 160 Liters
PUMPS : Variable displacement piston pump
WORKING PRESSURE : Steering - 13.7 Mpa
Tipping - 17 Mpa
Full flow filtration

CAB

- Fully adjustable weight compensation suspension seat with seat belt
- ROPS and FOPS certified
- Windscreen wiper
- Rotating orange beacon light
- Interior dome light
- Rubber mounted
- Fully enclosed and lockable
- Rear cab night working lights
- Trainer-driver seat

SERVICE CAPACITIES

COOLING SYSTEM : 50 Liters
ENGINE CRANKCASE : 21 Liters
FRONT DIFFERENTIAL : 36 Liters
FRONT PLANETARY HUBS : 8 Liters per side
REAR TANDEM DRIVE : 185 Liters
TRANSMISSION : 18 Liters
DIESEL TANK : 250 Liters

OPERATIONAL WEIGHTS

	Tare	Gross	Payload
FRONT AXLE :	8 700	13 674	4 974
MIDDLE AXLE :	4 840	14 853	10 013
REAR AXLE :	4 840	14 853	10 013
TOTAL :	18 380	43 380	25 000

STANDARD EQUIPMENT


- Emergency braking (front & rear)
- Hinged belly plate under engine
- Rear window guard
- Tinted windows
- Dash board with full instrumentation
- Air-conditioner
- Bin up alarm

TIPPING TIMES (APPROXIMATE)

UP : 8.2 Seconds DOWN : 7.1 Seconds

LOAD BIN VOLUMES

SAE 1:1 : 16,3m3 SAE 2:1 : 14,0m3 STRUCK : 10,1m3

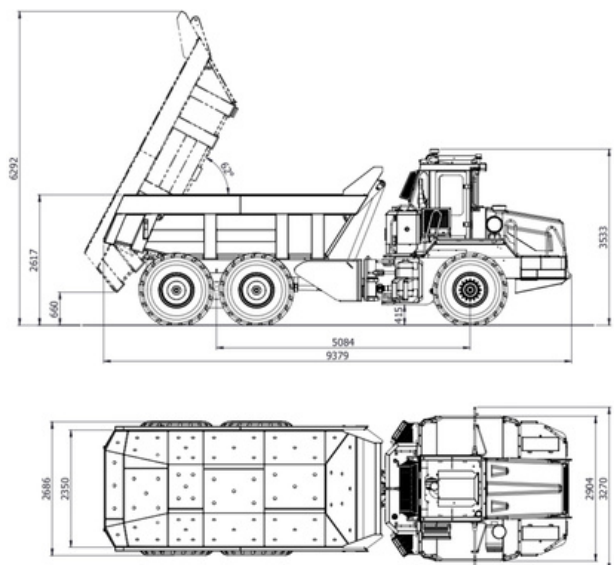

CALL : 0800 DEZZI / 33994
Head Office: +27 (0)39-685 4100
Email: machinesales@dezzi.co.za
www.dezzi.co.za